



Nabi 2S Battery Replacement

Use this guide to replace the battery of your device.

Written By: Riana Ramirez



INTRODUCTION

This guide will aid you in the process of removing the battery of the device. This is useful in replacing a broken or dis-functioning battery.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Nabi 2S Disassembly



- Remove the red rubber case from the device.

Step 2



- Make sure the screen is facing away from you and the back cover is facing you.
- Using a Phillips #0 Screwdriver, unscrew the 3mm screws counter-clockwise in each corner of the plastic back cover. It will be a total of four screws. The smaller case on the back cover is attached to the main cover so it will not need to be removed.

Step 3





- Using the plastic opening tool, remove the case.
- ⓘ Removing the case will take a bit of effort and force. We recommend using two hands and if possible another person to help. It will require some gusto.
- ⓘ It is helpful to pry at the corners first to loosen the case.

Step 4




- After the back case is loosened, remove it from the device to change or access the battery.

Step 5 — Battery

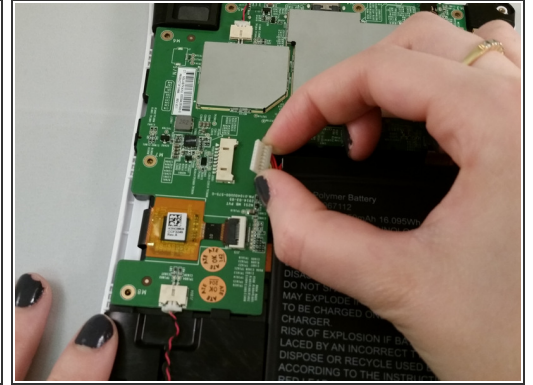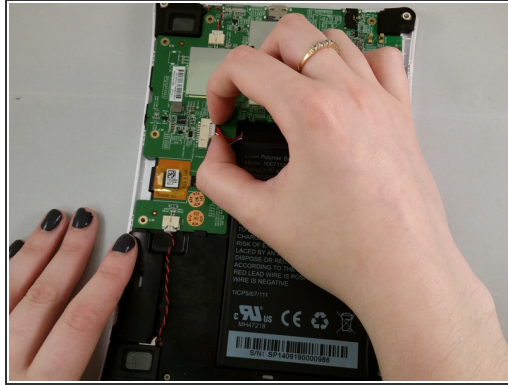

- Grasp the circuit connected to the battery via wires.
- Slide the wires from the circuit to detach it.

Step 6

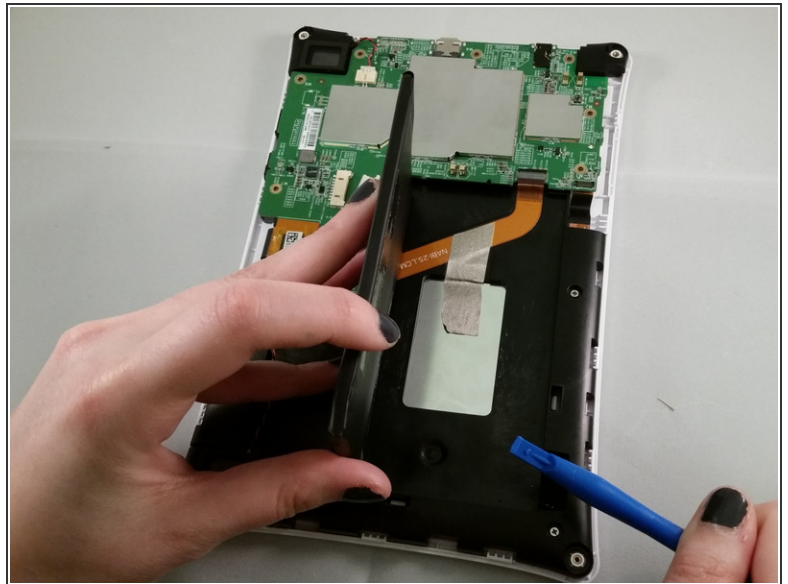

- After the circuit is detached, the battery will be easily removable.
- ⓘ Don't rip the battery off of the board.
- ⚠ The battery is stuck with adhesive tape to the board.
- ⓘ Use a plastic opening tool to apply pressure to the battery and lift it up from the adhesive.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-09 02:23:02 AM.